Technical Specification

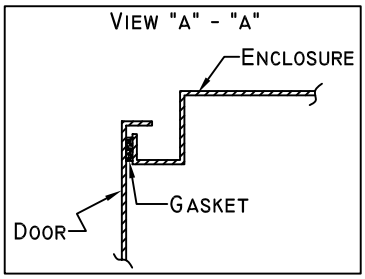

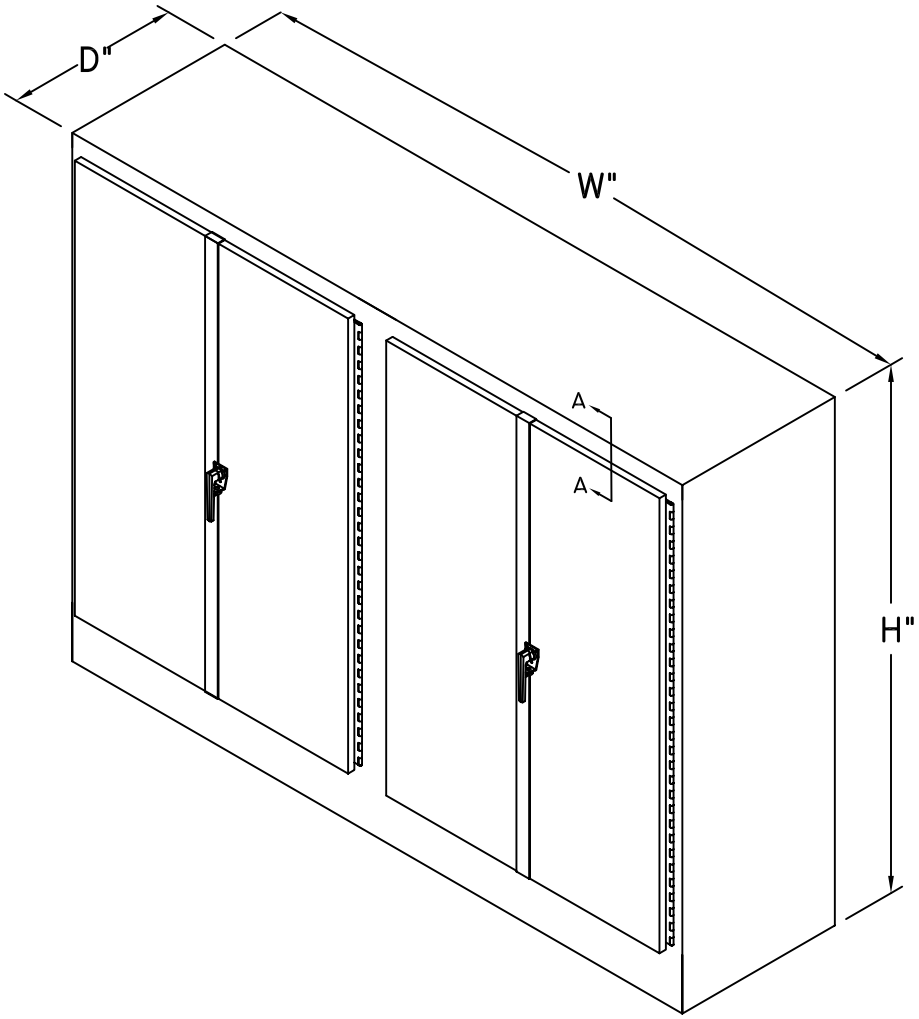

NEMA 3R Freestanding Exterior Enclosure

- Freestanding enclosures are constucted with all welded seams. Material is galvanealed sheet steel, conforming with ASTM A653.
- Single or double doors provided with continuous piano hinges. 3-point latching mechanism supplied with either padlock or keylock handle.
- Total custom capability allows us to meet a wide range of customer needs. We can supply special sizes, shapes, holes, or cutouts.
- Freestanding enclosures are constucted in accordance with UL bulletin #50 and NEMA 3R specifications.

UNLESS OTHERWISE SPECIFIED:
DIMENSIONS ARE IN INCHES; TOLERANCES

FRACTIONS	DECIMALS	ANGLES
± .030"	.XX ± .020"	± 0° 30'
	.XXX ± .010"	

DIMENSIONAL LIMITS APPLY BEFORE FINAL FINISH.

MATERIAL: ASTM A653 Galvanealed

FINISH: Painted

NOTICE
THIS INFORMATION IS THE PROPERTY OF N.J. SULLIVAN CO., ANY REPRODUCTION, PUBLICATION OR DISTRIBUTION TO A THIRD PARTY IS STRICKLY FORBIDDEN UNLESS WRITTEN PERMISSIONS ARE GIVEN BY AN AUTHORIZED AGENT OF
N.J. SULLIVAN CO., INC.

DFTG.:	DATE: 04 / 18 / 01	
CHKR.:	DATE:	
MECH. ENG.:	DATE:	
ELEC. ENG.:	DATE:	
PROJ. ENG.:	DATE:	

N.J. SULLIVAN CO.
INCORPORATED
P.O. BOX 438, STERLING, VIRGINIA 20167
METAL FABRICATION
PHONE: (703)-471-0544 FAX: (703)-471-0275

DWG. TITLE: Technical Specifications
Nema 3R
Freestanding Exterior Enclosure

DWG. NO.: P10009 REV.

SCALE: None SHEET 1 OF 1