


4000 AMP / 3 PHASE TERMINATION CABINET

- TERMINATION CABINETS ARE CONSTRUCTED WITH ALL WELDED SEAMS. MATERIAL IS GALVANNEALED SHEET STEEL CONFORMING WITH ASTM A653. FINISH IS POWDER COATED ANSI 61 GRAY.
- Double doors provided with continuous, stainless steel piano hinges. 3 point latching mechanism supplied with padlockable handle. Bottom is open with a 1.5" internal flange and $\frac{5}{8}$ " holes for mounting.
- BUSBARS ARE FABRICATED FROM ALUMINUM ALLOY BAR STOCK, ¼" THICK, 6101-T61 IN ACCORDANCE WITH ASTM B317. BUSBARS ARE PUNCHED TO ACCOMMODATE STANDARD 2 HOLE HIGH-PRESS LUGS.
- POWER TERMINATION CABINETS ARE CONSTRUCTED IN ACCORDANCE WITH UL BULLETIN #50 AND NEMA 3R SPECIFICATIONS.

DOMINION VIRGINIA POWER APPROVED PART# PPTCDV4




1	NOTICE:
	THIS INFORMATION IS THE PROPERTY OF N.J.
	SULLIVAN CO., ANY REPRODUCTION, PUBLICATION
	OR DISTRIBUTION TO A THIRD PARTY IS STRICKLY
	FORBIDDEN UNLESS WRITTEN PERMISSIONS ARE
	GIVEN BY AN AUTHORIZED AGENT OF:
	N.J. SULLIVAN CO., INC.

DFTG.:	CD	DATE:	2/21/14
CHKR.:		DATE:	
REV.:		DATE:	
REV.:		DATE:	
REV.:		DATE:	



Technical Specification

BOTTOM VIEW FOR FOR PARTS PPTCDV4-6

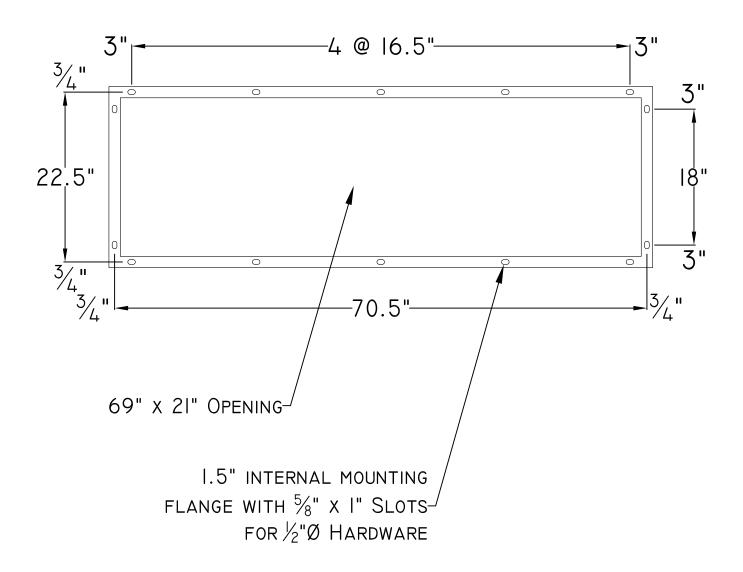

DWG. TITLE:	Mounting Flange for Parts PPTCDV4-6
DWG. NO.:	P10122
MATERIAL:	ASTM A653 GALVANNEALED
FINISH:	ANSI 61 GRAY

NOTICE:
THIS INFORMATION IS THE PROPERTY OF N.J.
SULLIVAN CO., ANY REPRODUCTION, PUBLICATION
OR DISTRIBUTION TO A THIRD PARTY IS STRICKLY
FORBIDDEN UNLESS WRITTEN PERMISSIONS ARE
GIVEN BY AN AUTHORIZED AGENT OF:
N.J. SULLIVAN CO., INC.

THIS SOLETY AT COLUMN				
DFTG.:	CD	DATE:	2/27/14	
CHKR.:		DATE:		
REV.:		DATE:		
REV.:		DATE:		
REV.:		DATE:		



P.O. BOX 438, STERLING, VIRGINIA 20167
METAL FABRICATION
Phone: (703)-464-5944 Fax: (703)-464-5992
www.njsullivan.com