



DWG NO 400A / Part No. PTCDV-1 P10102

DWG TITLE

Power Termination Cabinet

MATERIAL: 14 Ga Galvanized ASTM A924 - G90-U

REV.: CHKR DFTG.

> DATE: DATE

DATE: DATE:

FINISH


THIS INFORMATION IS THE PROPERTY OF N.J. SULLIVAN CO., ANY REPRODUCTION, PUBLICATION OR DISTRIBUTION TO A THIRD PARTY IS STRICTLY FORBIDDEN UNLESS WRITTEN PERMISSIONS ARE GIVEN BY AN AUTHORIZED AGENT OF:

N.J. SULLIVAN CO., INC.

SULLIVAN **C**•

Phone: (703)-464-5944 Fax: (703)-464-5992 www.njsullivan.com INCORPORATED
P.O. BOX 438, STERLING, VIRGINIA 20167
METAL FABRICATION



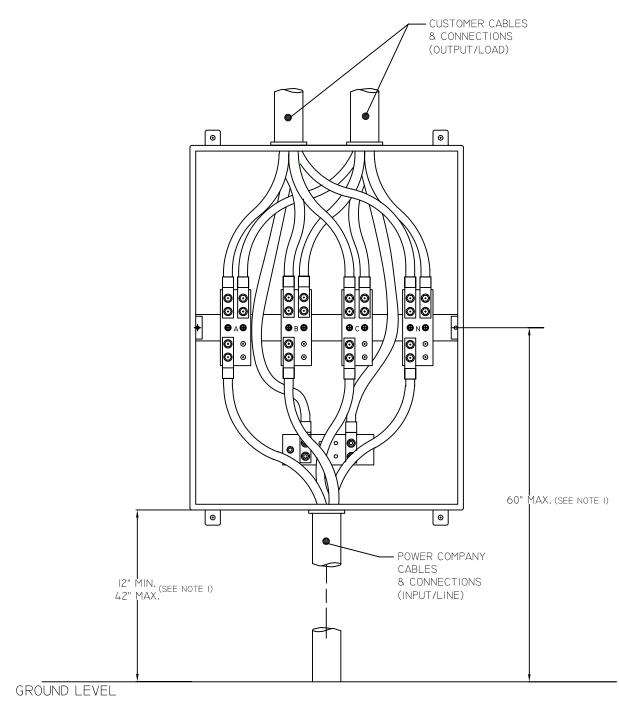

TYPICAL INSTALLATION

NOTE I - VERIFY MOUNTING HEIGHTS WITH LOCAL POWER COMPANY REQUIREMENTS.

DWG. TITLE:	Typical Installation PTCDV-1/2/3	
DWG. NO.:	P10101	
MATERIAL:	PTCDV Install	
FINISH:		

NOTICE:
THIS INFORMATION IS THE PROPERTY OF N.J.
SULLIVAN CO., ANY REPRODUCTION, PUBLICATION
OR DISTRIBUTION TO A THIRD PARTY IS STRICTLY
FORBIDDEN UNLESS WRITTEN PERMISSIONS ARE
GIVEN BY AN AUTHORIZED AGENT OF:
N.J. SULLIVAN CO., INC.

DFTG.:	CD	DATE:	12/8/11
CHKR.:		DATE:	
REV.:		DATE:	
REV.:		DATE:	
REV.:		DATE:	



INCORPORATED
P.O. BOX 438, STERLING, VIRGINIA 20167
METAL FABRICATION Phone: (703)-464-5944 Fax: (703)-464-5992 www.njsullivan.com

Dominion Virginia Power Termination Cabinets Notes

- 1 CABINET FABRICATION IS A WELDED CONSTRUCTION IN ACCORDANCE WITH NEMA TYPE 3R SPECIFICATIONS. MATERIAL IS 14 GAUGE (PART NO. PTCDV1) AND 12 GAUGE (PART NOS. PTCDV-2/3/4) G-90U GRADE GALVANIZED STEEL IN ACCORDANCE WITH ASTM A924 G90-U. ALL JOINTS AND SEAMS ARE WELDED THEN REFINISHED WITH GALVANIC COATING TO PRESERVE FINISH.
- 2 BUSS BAR MOUNTING CHANNELS ARE FABRICATED FROM 12 GAUGE G-90U GRADE GALVANIZED STEEL IN ACCORDANCE WITH ASTM A924.
- 3 BUSS BARS ARE FABRICATED FROM ALUMINUM ALLOY BAR STOCK, 1/4" THICK, 6101-T61 IN ACCORDANCE WITH ASTM B317. MINIMUM ELECTRICAL CONDUCTIVITY AT 20° C % IACS IS 57%. BUSS BARS ARE PUNCHED TO ACCOMMODATE STANDARD 2 HOLE HIGH-PRESS LUGS.
- 4 ALL STANDOFF INSULATORS ARE MOLDED OF UL RECOGNIZED FLAME RESISTANT FIBERGLASS-REINFORCED THERMOSET POLYESTER MOLDING COMPOUND WITH THREADED INSERTS AT EACH END. UL RECOGNIZED ACCORDING TO UL STANDARD FOR SAFETY 891. VOLTAGE RATING FOR STANDOFFS USED ON PART NOS. PTCDV-1/2/3 600V; PART NO. PTCDV-4, 2300V.
- 5 GRADE 5 PLATED STEEL HARDWARE FOR LUG CONNECTIONS IS PROVIDED.
- 6 ALTERNATE CONFIGURATIONS OF CABINETS, CHANNELS, AND BUSS BARS MAY BE PROVIDED TO MEET YOUR REQUIREMENTS UPON REQUEST.
- 7 POWER TERMINATION CABINETS ARE 600 VOLT CLASS.
- 8 ALL POWER TERMINATION CABINETS ARE UL LABELED.

PART	PART USAGE	AMPERAGE RATING	CONDUCTORS PER PHASE	CABINET DIMENSIONS		
NUMBER				HEIGHT	WIDTH	DEPTH
PTCDV-I	INDOOR/ OUTDOOR	0 - 400	4- MAX	36"	30"	13"
PTCDV-2	INDOOR/ OUTDOOR	401 - 1200	4- MAX	48"	36"	14"
PTCDV-3	INDOOR/ OUTDOOR	1201 - 3000	6- MAX	60"	48"	19"
PTCDV-4	INDOOR/ OUTDOOR	3001-4000	12- MAX	91.5"	48"	30"



DWG. TITLE:	Power Termination Cabinet PTCDV1 - PTCDV4 for Dominion Virginia Power Specifications
DWG. NO.:	P10100
MATERIAL:	Specifications
FINISH:	

NOTICE:
THIS INFORMATION IS THE PROPERTY OF N.J.
SULLIVAN CO., ANY REPRODUCTION, PUBLICATION
OR DISTRIBUTION TO A THIRD PARTY IS STRICTLY
FORBIDDEN UNLESS WRITTEN PERMISSIONS ARE
GIVEN BY AN AUTHORIZED AGENT OF:
N.J. SULLIVAN CO., INC.

DFTG.:	CD	DATE:	12/8/11
CHKR.:		DATE:	
REV.:		DATE:	
REV.:		DATE:	
REV.:		DATE:	



www.njsullivan.com